


Type 25475 PVDF / 10 | 25478 PP / 2,5 | 25479 PVC / 2,5

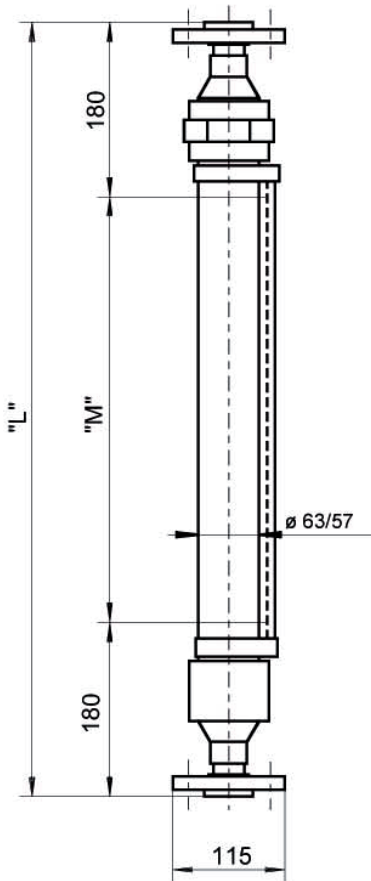

Technical Data

Operating Conditions

Medium

Density

min 0.75 g/cm³

	g/cm ³

Pressure/Temperature

Op. Pressure Type 25475

max. 10 bar g

Type 25478

max. 2,5 bar g

Type 25479

max. 2,5 bar g

Design Pressure

bar g

Op. Temp. Type 25475

max. 140 °C

Type 25478

max. 80 °C

Type 25479

max. 60 °C

Design Temperature

° C

	bar g
	bar g
	bar g
	bar
	° C
	° C
	° C
	° C

Indication Rail

Version

Makrolon

Makr. with protection tube

Alu flaps red

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>

Material

Float chamber

PVDF resp. PP resp. PVC

Float

PVDF resp. PP resp. PVC

Dimensions

Total length

Dimension " L "

mm

--

Flange Connections

Flange connection with saddle flange and bushing

Standard/Nom.Pressure

VSM 18696/PN10

DIN 8063/PN10

Nominal Diameter

DN 25

DN

Accessories

Magnetic Switch

Number

Type

Transmitter

Type

Indication length

mm

Control unit/voltage

Volt

AC / DC

Type

Additional Accessories acc. attached sheet

<input type="checkbox"/>

Edition: 10/2015. Technical specifications are for information only and may change without notice.