


Type 25670 PVDF / 10 | 25672 PP / 2,5 | 25674 PVC / 2,5

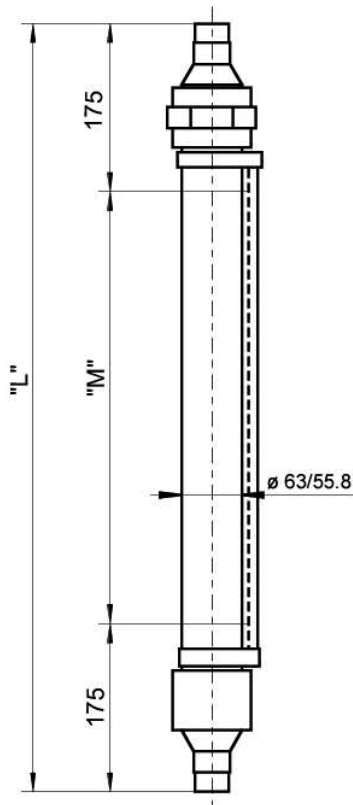

**Technical Data**

**Operating Conditions**

**Medium**

**Density**

min 0.75 g/cm<sup>3</sup>

	g/cm <sup>3</sup>

**Pressure/Temperature**

Op. Pressure Type 25670

max. 10 bar g

Type 25672

max. 2,5 bar g

Type 25674

max. 2,5 bar g

Design Pressure

bar g

Op. Temp. Type 25670

max. 140 °C

Type 25672

max. 80 °C

Type 25674

max. 60 °C

Design Temperature

°C

**Indication Rail**

Version

Makrolon

Makr.with protection tube

Alu red flaps

<input type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>

**Material**

Float chamber

PVDF resp. PP resp. PVC

Float

PVDF resp. PP resp. PVC


**Dimensions**

Total length

Dimension " L "

mm

--

**Process Connections**

Female thread

G ½"

--

**Accessories**

Magnetic Switch

number

Type

Transmitter

Type

Indication length

mm

Control unit/voltage

Volt

AC / DC

Type

number	Type
Type	Indication length mm
Volt	AC / DC Type

Additional Accessories acc. attached sheet

<input type="checkbox"/>
--------------------------

Edition: 10/2015. Technical specifications are for information only and may change without notice.