


# SR 31

## Dimensions

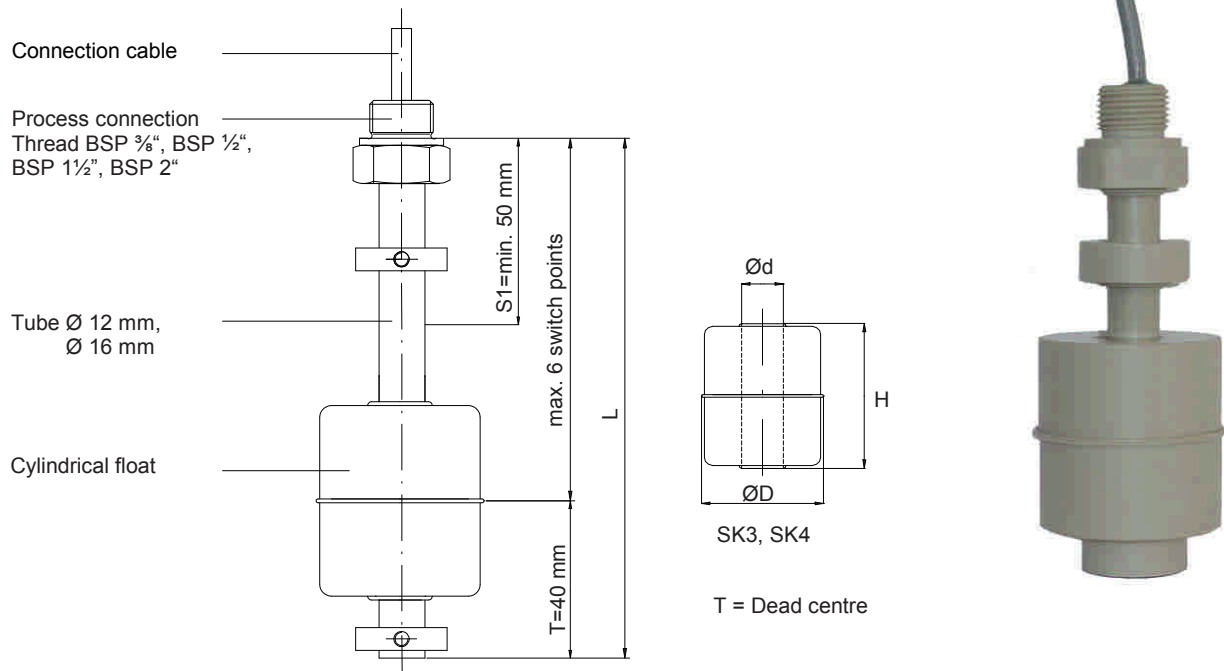

Float type	Dimensions			Max. operating pressure (MPa)	Max. operating temperature (°C)	Medium density kg/m <sup>3</sup>	Material
	Ø D (mm)	Ø d (mm)	H (mm)				
SK3 Cylindrical float	44	14	45	0.3	80	≥ 600	PP
SK4 Cylindrical float	55	18	55	0.3	80	≥ 600	PP

## Technical data

**Max. Power**

**Opener / Closer:**  
230 V AC; 100 VA; 1 A AC  
230 V DC; 50 W; 0,5 A DC

**Change-over switch:**  
230 V AC; 40 VA; 1 A AC  
230 V DC; 20 W; 0,5 A DC

**Switch function**

opener / closer /  
change-over switch  
with a rising liquid level

**Installation position**

vertical, ± 30°

**Medium density**

≥ 600 kg/m<sup>3</sup>

**Temperature**

-10°C up to +80°C

**Protection**

IP 54

**Max. pressure**

0,3 MPa

**Tube length L**

Standard: up to 1500 mm

**Process connection**

Standard: Thread BSP 3/8",  
BSP 1/2", BSP 1 1/2", BSP 2",  
other types on request

**Material**

PP, other materials  
e.g. PVC, PVDF etc.  
on request

